



T25 Timberwolf Woodburning Stove



T25 Wood Stove

KEY SERIES FEATURES

- Up to 70,000 BTU
- 2.5 cu. ft. firebox capacity
- Burn time: 16 hours
- Weighted average emissions rate: 1.3 g/hr.
- Weighted average overall efficiency: 76%
- Tested and certified to EPA 2020 cord wood requirements
- Heavy duty 5/16" firebox top
- Ceramic fiber baffle system
- Hidden hinges and extra large glass viewing area
- Contemporary medium sized wood stove completed with cast door, cast ash lip and cast pedestal base
- Precision easy-glide ash drawer with removable ash pan complete with lid for convenient and easy disposal (optional)
- Top and rear heat shield included
- Flue Size: 6"

Clean and contemporary lines with the stately strength of old-world charm, a woodburning stove is a fantastic way to provide heating to your home space. The Timberwolf woodburning stoves are built to be convenient and uncomplicated when it comes to use. The T25 woodburning stove provides an extremely long burn times - up to 16-hours - so keeping toasty overnight isn't a problem at all. And with an output of up to 70,000 BTUs, you'll always be warm. No electricity, no problem. A woodburning stove provides heat and light, no matter what. There's nothing like building a fire, real wood, the smell, the sound, the sight, however, it can also get a little untidy. A built-in, full-width ash lip ensures that your floors remain clean, while the easy-to-remove ash pan ensures that cleanup is a breeze.



Ash Disposal Kit (Optional)



Reduced Clearance Heat Shield (Optional)



Blower (Optional)



Easy To Open Door Handle



Air Shutter Control



Large Glass Viewing Area



T25 Wood Stove

The T25 woodburning stove is clean and contemporary looking. Featuring EPA 2020 certified woodburning technology and extremely long burn times - up to 16 hours. The extra-large viewing area ensures that you can watch the fire for pleasure instead of babysitting the fire for reloading. A heavy-duty firebox top and full-width ash lip to protect your floor from debris, while a large ash pan with easy glide rollers ensures clean up is effortless. Clean and contemporary lines allow this wood burning stove to blend into your current décor while remaining highly efficient.

T25 Timberwolf Woodburning Stove


FEATURES

| | |
|--|-----------------------------|
| COLOR | Black |
| BURN TIME (ON LOW SETTING) | 16.26 hours |
| COMBUSTION TECHNOLOGY | Non-catalytic |
| RECOMMENDED HEATING AREA (1) | Up to 2,100 ft ² |
| HEATING CAPACITY - BTU/h, SEASONED CORD WOOD | 70,000 BTU/h |
| EMISSIONS (EPA) | 1.30 g/h |
| OPTIMUM EFFICIENCY | 71.56% |
| FIREBOX DIMENSIONS (W X D) | 23 1/2" x 18" |
| FIREBOX VOLUME | 2.51 ft ³ |
| GLASS VIEWING AREA (W X H) | 18 1/2" x 10 7/8" |
| DOOR TYPE | Cast Iron Door |
| MAXIMUM LOG LENGTH | 17" or 23" |
| LOG POSITIONING | Front-back or Left-right |
| FLUE COLLAR DIAMETER | 6" |
| GLASS TYPE | Ceramic glass |
| ASH DRAWER WITH SAFETY LID | Optional |
| MOBILE HOME APPROVED | Yes |
| APPROVED FOR AN ALCOVE INSTALLATION | Yes |
| WARRANTY | Presidents Limited lifetime |

EXTERIOR DIMENSIONS AND WEIGHT

| | |
|--------|-----------|
| WIDTH | 28 3/4" |
| DEPTH | 27" |
| HEIGHT | 37 1/2" |
| WEIGHT | 426.4 lb. |

| CONFIGURATION | | SIDE WALL (A) | SIDE WALL TO FLUE (B) | BACK WALL (C) | BACK WALL TO FLUE (D) | CEILING (E) |
|----------------|--|---------------------|-----------------------|---------------------|-----------------------|------------------|
| With T.H.S. | Straight with single wall pipe | 16 1/4" (41.2cm) | 27 1/2" (69.8cm) | 9 1/2" (24.1cm) | 11" (27.9cm) | 84" (213.3cm) |
| | Straight with double wall pipe | | | 6 1/2" (16.5cm) | 7 1/2" (19cm) | |
| | Through the wall with single wall pipe | | | 9 1/2" (24.1cm) | 11" (27.9cm) | |
| | Through the wall with double wall pipe | | | 6 1/2" (16.5cm) | 7 1/2" (19cm) | |
| Without T.H.S. | Straight with single wall pipe * | 16 1/4" (41.2cm) | 27 1/2" (69.8cm) | 14 1/2" (36.8cm) | 16" (40.6cm) | 96" (243.8cm) |
| | Straight with double wall pipe * | | | 12 1/2" (31.7cm) | 13 1/2" (34.2cm) | |
| | Through the wall with single wall pipe * | | | 14 1/2" (36.8cm) | 16" (40.6cm) | |
| | Through the wall with double wall pipe * | | | 12 1/2" (31.7cm) | 13 1/2" (34.2cm) | |
| CONFIGURATION | | SIDE WALL | SIDE WALL TO FLUE | BACK WALL | BACK WALL TO FLUE | CEILING |
| With T.H.S. | Corner (F) | 4" (10.1cm) | 14 1/4" (36.1cm) | 4" (10.1cm) | 14 1/4" (36.1cm) | 84" (213.3cm) |
| Without T.H.S. | Corner (F) * | 6" (15.2cm) | 16 1/4" (41.3cm) | 6" (15.2cm) | 16 1/4" (41.2cm) | 96" (243.8cm) |

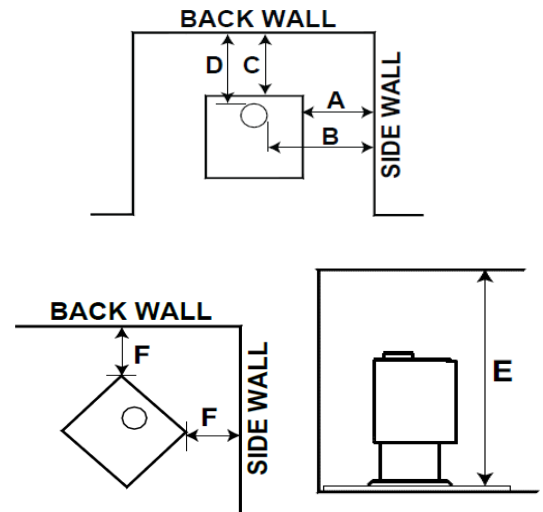

Unit Dimensions

