



## T25I Timberwolf Woodburning Insert



T25I Wood Insert

### KEY SERIES FEATURES

- Up to 70,000 BTU's
- 2.5 cu. ft. firebox capacity
- Burn time: 16.26 hours
- Weighted average emissions rate: 1.30 g/hr.
- Weighted average overall efficiency: 72%
- Tested and certified to EPA 2020 cord wood requirements
- Hidden hinges and extra large glass viewing area
- Tested to 2020 cord wood requirements
- Minimum fireplace opening: 31"W x 23 1/2"H x 15 1/2"D
- Dual blower system included
- Flue Size: 6"

The Timberwolf T25I woodburning fireplace Insert is clean and contemporary looking. Featuring EPA 2020 certified woodburning technology and extremely long burn times - up to 16 hours. The extra-large viewing area ensures that you can watch the fire for pleasure instead of babysitting the fire for reloading. An included dual blower system quietly circulates heat throughout your room. Clean and contemporary lines allow this woodburning fireplace insert to blend into your current décor while remaining highly efficient.



SBP25I3041 - 30"h x 41"w  
SBP25I3348 - 33"h x 48"w  
Backer Plate (1-Required)



Easy To Open Door Handle



Blower (Included)



Air Shutter Control



Large Glass Viewing Area



T20I Wood Insert

Self-contained and more efficient than an existing woodburning fireplace opening, a woodburning insert is a great way to ensure that your home is running more productively. Venting out the existing chimney, woodburning Inserts ensure that drafts can no longer enter your home. These inserts are built to exceed standards for clean-burning which ensures loads of even heat and comfort for hours on end. Whether you go with a contemporary, clean-lined look or something a little more on the traditional side, there is nothing compared to the joy and scent of building your own woodburning fire in a woodburning insert.

# T25I Timberwolf Woodburning Insert

## FEATURES

COLOR	Black
BURN TIME (ON LOW SETTING)	16.26 hours
COMBUSTION TECHNOLOGY	Non-catalytic
RECOMMENDED HEATING AREA (1)	Up to 2,100 ft <sup>2</sup>
HEATING CAPACITY - BTU/h, SEASONED CORD WOOD	70,000 BTU/h
EMISSIONS (EPA)	1.30 g/h
OPTIMUM EFFICIENCY	71.56%
FIREBOX DIMENSIONS (W X D)	23 1/2" x 18"
FIREBOX VOLUME	2.51 ft <sup>3</sup>
GLASS VIEWING AREA (W X H)	18 1/2" x 10 7/8"
DOOR TYPE	Cast Iron Door
MAXIMUM LOG LENGTH	17" or 23"
LOG POSITIONING	Front-back/Left-right
FLUE COLLAR DIAMETER	6"
GLASS TYPE	Ceramic glass
WARRANTY	Presidents Limited lifetime

## EXTERIOR DIMENSIONS AND WEIGHT

WIDTH	28 3/4"
DEPTH	26"
HEIGHT	20 1/8"
WEIGHT	439 lb.

## MINIMUM CLEARANCES (Fig. 1)

A - Sidewall	20 1/2"
B - Mantel	30"
C - Top Facing w/ floor protection	6.5"
D - Side Facing	15"
E - Hearth (front)	19"
F - Minimum hearth thickness	16"
G - Hearth (side)	8"
H In front of insert	48"

## MINIMUM EXISTING FIREPLACE DIMENSIONS (Fig. 2)

I - Width (rear)	29"
J - Width (front)	31"
K - Height (front)	23 1/2"
L - Height (rear)	23 1/2"
M - Min. Depth	15 1/2"
N - Hearth width	44 3/4"
O - Min. Facing width w/ SBP25I3348	48"
O - Min. Facing width w/ SBP25I3041	41"
P - Min. Facing Height w/ SBP25I3348	33"
P - Min. Facing Height w/ SBP25I3348	30"
R - Mantle	53 1/2"

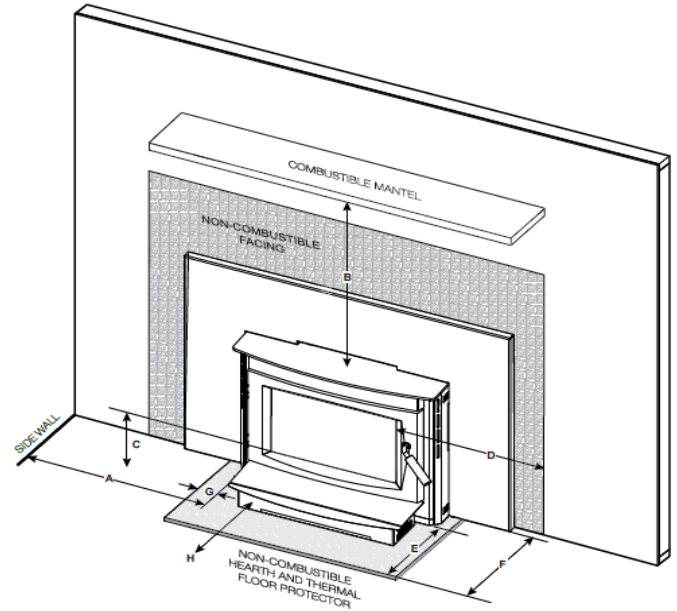


Fig. 1

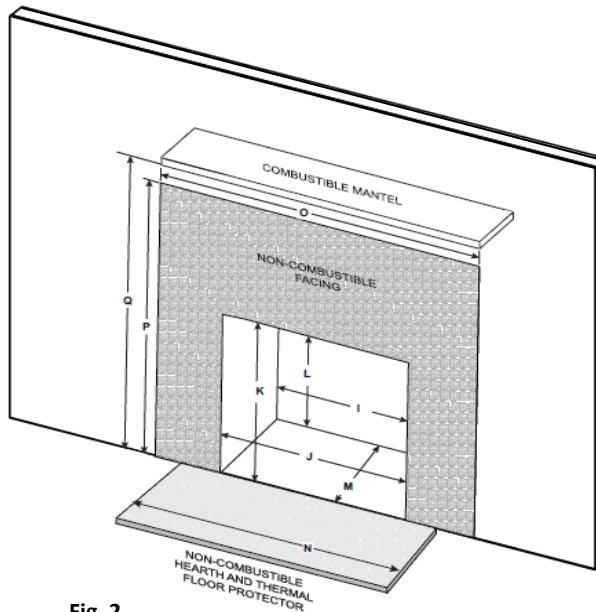


Fig. 2

## Unit Dimensions

