



## TZ3000H Timberwolf Woodburning Fireplace



TZ3000H Woodburning Fireplace

### KEY SERIES FEATURES

- Up to 60,000 BTU's
- 2.3 cu. ft. firebox capacity
- Weighted average emissions rate: 1.38 g/hr.
- Weighted average overall efficiency: 67.9%
- Catalytic Converter
- Tested and certified to EPA 2020 cord wood requirements
- Cast iron front doors
- Outside air control lever
- Black andirons
- Cast iron bypass door and baffle
- Flue Size: 7"

The Timberwolf TZ3000H is a wood burning fireplace that features exceptionally large viewing areas so you will never miss a second of the gorgeous glow from the fire. Heat radiating ceramic glass and a powerful air wash system makes this fireplace easy to light and keeps the glass clean. The state-of-the-art wood burning technology and hand-crafted beauty will last for generations.



FPK3-H Black Surround, H336-K



FPW13-H Wrought Iron Surround and  
H336H-WI Doors



TZ3000H Woodburning Fireplace

The Timberwolf TZ3000H achieves lowest emissions possible while still maintaining its heat. Easily increase the airflow through the unit to aid in starting a fire or when reloading fuel. A digital catalyst temperature monitor allows the operator to ensure their fireplace is always within the optimal temperature range to provide the lowest emissions possible, while the improved air wash system allows glass doors to stay cleaner. Add the luxury of a wood-burning fireplace to your home while remaining eco-conscious.



# TZ3000H Timberwolf Woodturning Fireplace

## FEATURES



<b>COLOR</b>	Black
<b>BURN TIME (ON LOW SETTING)</b>	17 hours
<b>COMBUSTION TECHNOLOGY</b>	Catalytic
<b>RECOMMENDED HEATING AREA (1)</b>	Up to 3,000 ft <sup>2</sup>
<b>HEATING CAPACITY - BTU/h, SEASONED CORD WOOD EMISSIONS (EPA)</b>	60,000 BTU/h 1.38 g/h
<b>OPTIMUM EFFICIENCY</b>	67.90%
<b>FIREBOX DIMENSIONS (W X D)</b>	25.75" x 13 3/4"
<b>FIREBOX VOLUME</b>	2.3 ft <sup>3</sup>
<b>GLASS VIEWING AREA (W X H)</b>	27 3/8" x 17"
<b>DOOR TYPE</b>	Cast Iron Door
<b>MAXIMUM LOG LENGTH</b>	25"
<b>LOG POSITIONING</b>	Left-right
<b>FLUE COLLAR DIAMETER</b>	7"
<b>GLASS TYPE</b>	Ceramic glass Presidents Limited lifetime
<b>WARRANTY</b>	

## EXTERIOR DIMENSIONS AND WEIGHT

<b>WIDTH</b>	42"
<b>DEPTH</b>	26 1/4"
<b>HEIGHT</b>	43 1/8"
<b>WEIGHT</b>	602 lb.

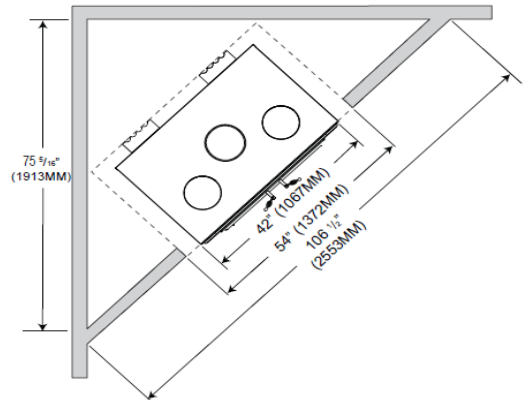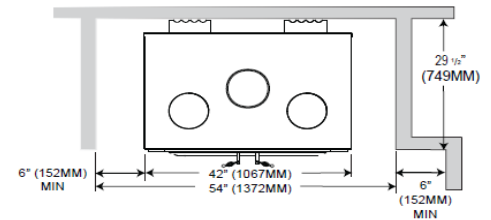


## Appliance Overview

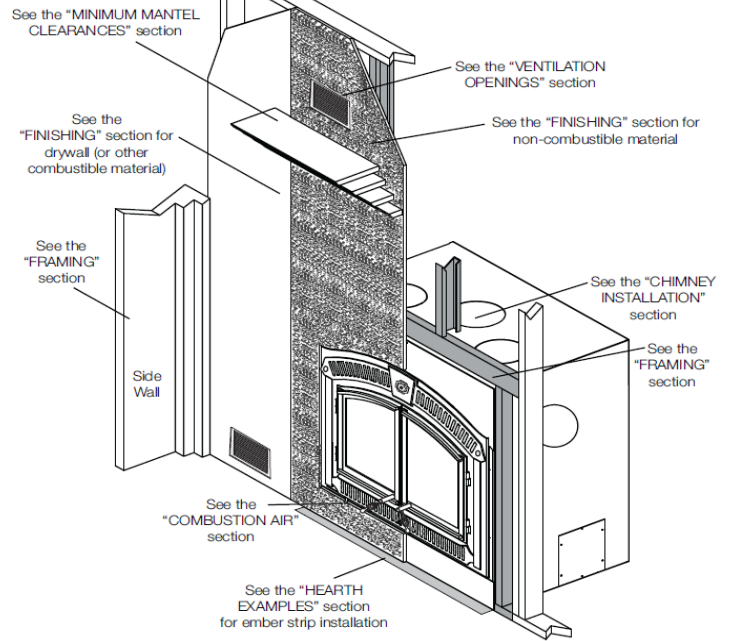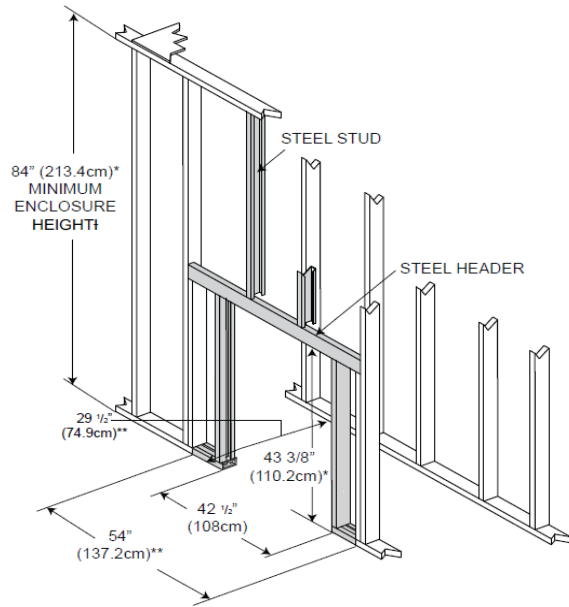


## Unit Dimensions

Front View

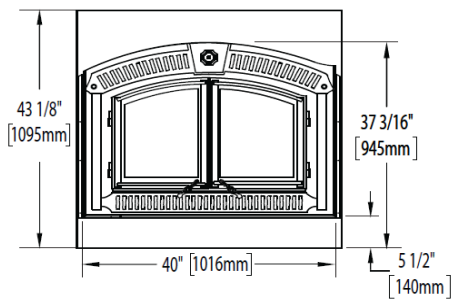

Right Side View

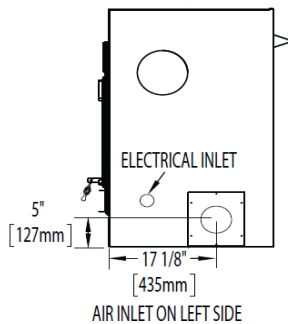

Top View

