

# ME150 Ventis Wood Fireplace

VB00004



## Key Features

- Designed mainly for ambiance
- EPA exempt
- Factory-installed doors and faceplate
- Fire screen doors included
- Includes 7" Ventis stainless anchor plate
- Fresh air intake adapter included
- Firebox Size 3 sq. ft.
- Double, ceramic glass steel frame door
- Optional premium quality blower
- Recommended heating area < 1,000 sq. ft.
- Recommended Log length 16 inches
- Flue Size 7 inches
- Minimum Flue Height 15 ft. from top of fireplace
- Non-catalytic combustion technology

## Options




VA4400 Blower with Variable Speed Control



AC01347 Fresh Air Kit with Airtight Damper

## Specifications

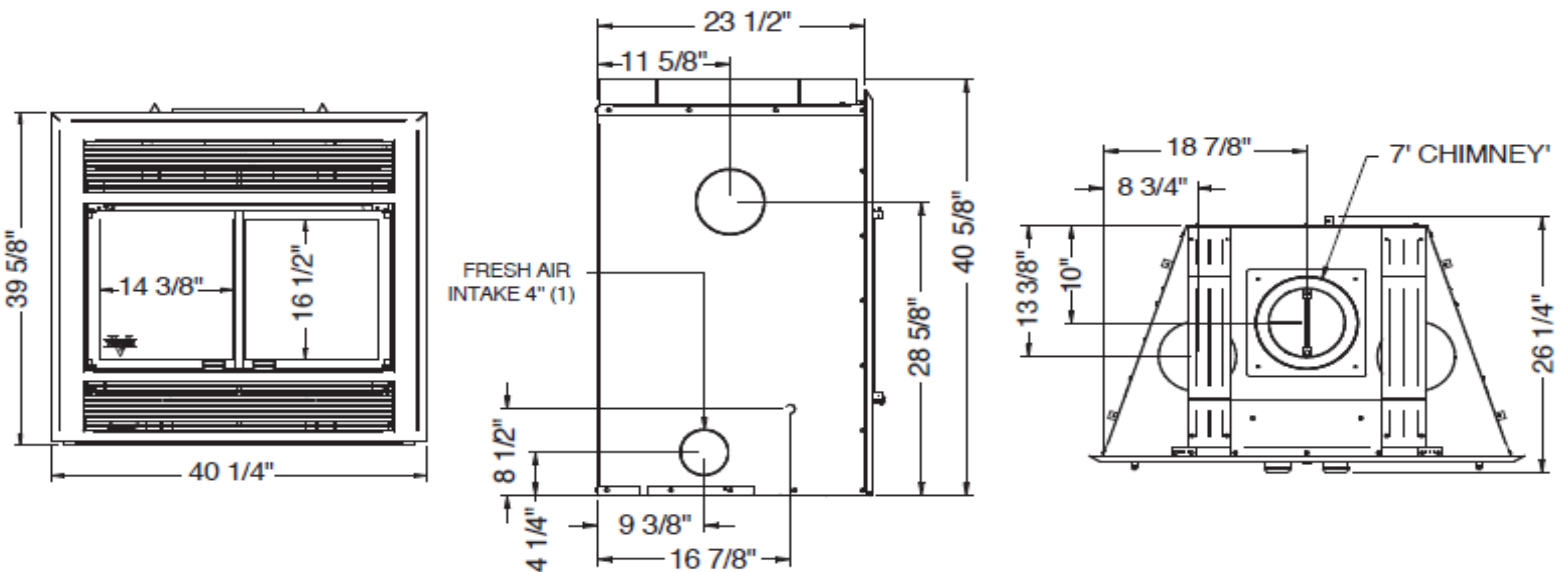

# ME150 Ventis Wood Fireplace

## FEATURES

COLOR	Black
BURN TIME (ON LOW SETTING)	N/A
COMBUSTION TECHNOLOGY	Non-catalytic
HEATING CAPACITY - BTU/h, EPA TEST LOAD	N/A
HEATING CAPACITY - BTU/h, SEASONED CORD WOOD	N/A
EMISSIONS (EPA)	N/A
OPTIMUM EFFICIENCY	N/A
DOOR OPENING DIMENSIONS (W X H)	28 1/4" x 14 1/2"
FIREBOX DIMENSIONS (W X D) BEHIND ANDIRON	19 5/8" x 10 1/8"
GLASS VIEWING AREA (W X H)	28 3/4" x 16 1/2"
DOOR TYPE	Double, glass with steel frame
MAXIMUM LOG LENGTH	16"
LOG POSITIONING	Over width
CHIMNEY DIAMETER (INNER)	7"
MINIMUM CHIMNEY HEIGHT (FROM BASE OF FIREPLACE)	15'
GLASS TYPE	Ceramic glass
WARRANTY	Limited lifetime

## EXTERIOR DIMENSIONS AND WEIGHT

WIDTH	40 1/4"
DEPTH	26 1/4"
HEIGHT	40 5/8"
WEIGHT	444 lb.

## CLEARANCES FROM UNIT TO COMBUSTIBLE MATERIALS

SIDE WALL	24"
BACK WALL	0"
SIDES	0"
FLOOR	0"
CEILING	84"
SHELF* (FROM BOTTOM OF FIREPLACE)	48"
SIDE MANTLE	5"
NON-COMBUSTIBLE SURROUND (TOP) FROM FACEPLATE	0"
NON-COMBUSTIBLE SURROUND (SIDES) FROM FACEPLATE	0"

*\*For installation of a 6" deep shelf. For other shelf dimensions, refer to the owner's manual. \*\*Non-combustible shelf only.*